



by Schneider Electric

# Rack PDU


## Overview

The APC by Schneider Electric Rack Power Distribution Unit (PDU) distributes power to devices in the rack.

**Outlets.** The PDU has fifteen (15) IEC-320-C13 outlets.

**Power cord.** The 6.5-foot (1.98-meter) power cord terminates with a IEC-320-C14 plug.

## AP9568

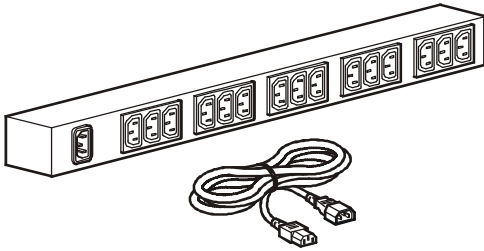



by Schneider Electric

## Specifications for AP9568

---

### Electrical

---

|                          |                          |
|--------------------------|--------------------------|
| Input connector          | IEC-320-C14 inlet        |
| Output connectors        | (15) IEC-320-C13 outlets |
| Nominal input voltage    | 120-240 VAC              |
| Acceptable input voltage | ± 10% of nominal voltage |
| Input frequency          | 50/60 Hz                 |

---

### Physical

---

|                                    |  |
|------------------------------------|--|
| Dimensions (H × W × D)             | 24.00 × 1.75 × 1.75 in<br>(60.96 × 4.44 × 4.44 cm)   |
| Shipping dimensions<br>(H × W × D) | 25.13 × 6.63 × 5.75 in<br>(63.81 × 16.82 × 14.60 cm) |
| Weight                             | 4.40lb (2.19kg)                                      |
| Shipping weight                    | 6.00lb (2.90kg)                                      |

---

### Environmental

---

|                       |                              |
|-----------------------|------------------------------|
| Elevation (above MSL) |                              |
| Operating             | 0 – 10,000 ft (0 – 3000m)    |
| Storage               | 0 – 50,000 ft (0 – 15 000m)  |
| Temperature           |                              |
| Operating             | 32 to 113° F (0 to 45° C)    |
| Storage               | -13 to 149° F (-25 to 65° C) |
| Humidity              |                              |
| Operating             | 5 – 95% RH non-condensing    |
| Storage               | 5 – 95% RH non-condensing    |

---

### Compliance

---

|        |  |
|--------|--|
| Safety | UL/ cUL Listed UL 60950,<br>EN 60950, VDE,<br>AS/NZS 60950 |
|--------|--|

---